


# Petroleum Products - Dock Service - PPDS 225 D

## Application/service:

For transferring petroleum products from bargers and tankers to shore and for general industrial applications where a lightweight and easy to handle hose is required. Suitable for unleaded fuel with max. 5% MTBE and max. 15% oxygenated compounds.

For longer life drain hose after use.

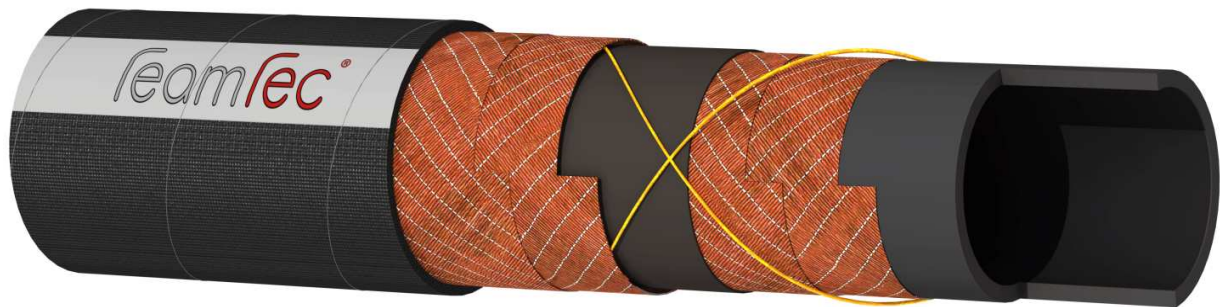

## Construction:

**Tube:** black, smooth, synthetic rubber suitable for petroleum products with max 60% aromatic content.

**Reinforcement:** synthetic cord plies and antistatic copper wires.

**Cover:** black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant.

**Generally in accordance to EN 1765 Type L15, BS 1435 Type L15.**

**Working temperature:** -20°C to +82°C (-4°F to +180°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
51	2	67	2.64	15	225	60	900	1.78	1.20	61	200
63.5	2-1/2	81	3.19	15	225	60	900	2.33	1.57	61	200
76	3	93	3.66	15	225	60	900	2.70	1.81	61	200
102	4	122	4.80	15	225	60	900	4.24	2.85	61	200
152	6	175	6.89	15	225	60	900	6.80	4.57	61	200
203	8	224	8.82	15	225	60	900	8.46	5.69	18.3	60
254	10	278	10.94	15	225	60	900	11.90	8.00	18.3	60

Other dimensions and pressures available on request.

\* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.