


Petroleum Products - Dock Service S&D - PPDS 225 SD

Application/service:

For suction & delivery of petroleum products from bargers and tankers to shore and for general industrial applications where a tough yet flexible hose is required. Suitable for unleaded fuel with max. 5% MTBE and max. 15% oxygenated compounds.

For longer life drain hose after use.

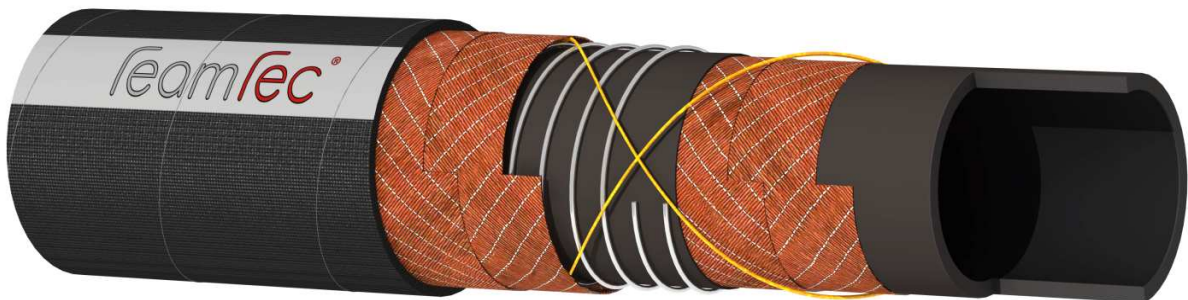

Construction:

Tube: black, smooth, synthetic rubber suitable for petroleum products with max 60% aromatic content.

Reinforcement: synthetic cord plies, embedded steel wire helix and antistatic wires.

Cover: black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant.

Generally in accordance to EN 1765 Type S15, BS 1435 Type S15.

Working temperature: -20°C to +82°C (-4°F to +180°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		vacuum	Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
76	3	98	3.86	15	225	60	900	4.16	2.80	450	17.7	0.9	61	200
102	4	130	5.12	15	225	60	900	7.30	4.91	1000	39.4	0.9	61	200
152	6	188	7.40	15	225	60	900	17.90	12.03	1200	47.2	0.9	61	200
203	8	240	9.45	15	225	60	900	23.10	15.52	1500	59.1	0.9	18.3	60
254	10	296	11.65	15	225	60	900	34.30	23.05	2500	98.4	0.9	18.3	60

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.