


Petroleum Products - Suction & Delivery - PPSD 240 SD

Application/service:

For suction and delivery of gasoline and diesel oil, for filling of tank truck and for delivery from tank truck to gas station. Suitable for unleaded fuel with max. 5% MTBE and max. 15% oxygenated compounds.

For longer life drain hose after use.

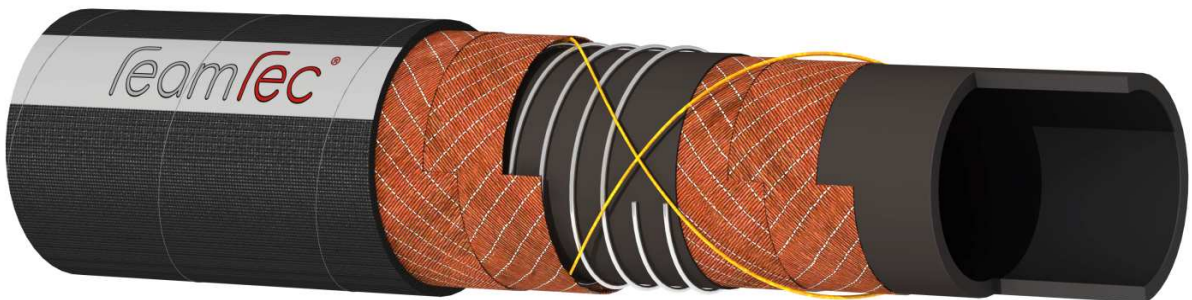

Construction:

Tube: black, smooth, synthetic rubber suitable for petroleum products with max 40% aromatic content.

Reinforcement: synthetic cord plies, antistatic copper wires and embedded steel wire helix.

Cover: black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant. Antistatic.

Fire resistant according to TRbF - 131 - Teil 2-5.5

Meets EN 1761-1999 Type Ω and EN 12115 - Type M specifications.

Working temperature: -30°C to +70°C (-22°F to +158°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		vacuum	Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
19	3/4	31	1.22	16	240	48	720	0.65	0.44	125	4.9	0.9	61	200
25	1	37	1.46	16	240	48	720	0.82	0.55	150	5.9	0.9	61	200
32	1-1/4	44	1.73	16	240	48	720	1.02	0.69	175	6.9	0.9	61	200
38	1-1/2	51	2	16	240	48	720	1.20	0.81	225	8.9	0.9	61	200
50	2	66	2.60	16	240	48	720	1.95	1.31	275	10.8	0.9	61	200
63.5	2-1/2	79	3.11	16	240	48	720	2.40	1.61	300	11.8	0.9	61	200
76	3	92	3.62	16	240	48	720	2.98	2.00	350	13.8	0.9	61	200
102	4	118	4.65	16	240	48	720	4.00	2.69	450	17.7	0.9	61	200

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.