


Tank Track Compressors - Hot Air Blower - TTHA 150 SD

Application/service:

Designed to convey hot air up to +170°C (+338°F) from blower to storage tanks, used in the transfer of dry bulk materials.
The white tube is food quality.

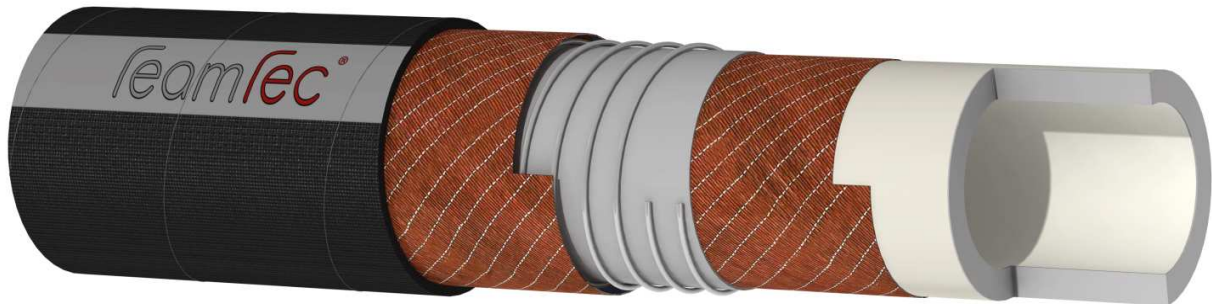

Construction:

Tube: white, smooth, synthetic rubber food quality, heat resistant.

Reinforcement: layers of synthetic cord plies and steel wire helix.

Cover: black, smooth (cloth finish) synthetic rubber abrasion, heat, ozone and weather resistant.

Meets FDA and European standards.

Working temperature: -40°C to +170°C (-40°F to +338°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		vacuum	Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
51	2	63	2.48	10	150	40	600	2.08	1.40	200	7.9	0.9	61	200
63.5	2-1/2	76	3	10	150	40	600	2.36	1.59	300	11.8	0.9	61	200
76	3	92	3.62	10	150	40	600	2.95	1.98	400	15.7	0.9	61	200
90	3-35/64	106	4.17	10	150	40	600	3.70	2.49	480	18.9	0.9	61	200
102	4	118	4.65	10	150	40	600	4.10	2.76	530	20.9	0.9	61	200

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.