


# MINING - Water Spray - M/WS 1000 D

## Application/service:

For general underground water spray service in dust control applications. Also suitable for use on mining machinery at the headface and on other mechanical mining machines.

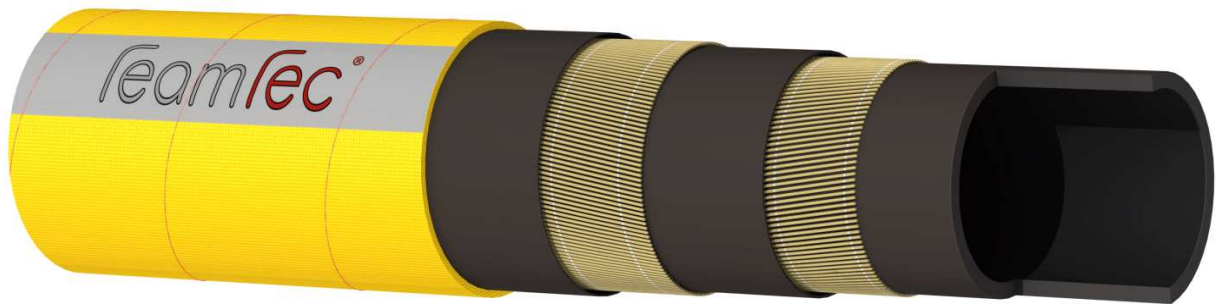

## Construction:

**Tube:** black, smooth synthetic rubber, oil mist resistant.

**Reinforcement:** steel cord wire.

**Cover:** yellow, smooth (cloth finish) CR rubber ozone and abrasion resistant.

**Fire resistant cover to ISO 15540:1999 specs (+800°C / +1472°F for 30 minutes).**

**Working temperature:** -30°C to +80°C (-22°F to +176°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
19	3/4	31	1.22	60	920	190	2920	0.71	0.48	61	200
25	1	37	1.46	50	770	170	2610	0.90	0.60	61	200
32	1-1/4	45	1.77	45	690	140	2150	1.19	0.80	61	200
38	1-1/2	52	2.05	40	615	130	2000	1.49	1.00	61	200
51	2	65	2.56	40	615	130	2000	2.10	1.41	61	200

Other dimensions and pressures available on request.

\* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.