


OIL RIG - Mud Base Oil 300 D

Application/service:

Used as a bulk hose in the offshore petroleum industry to transfer invert-emulsion or emulsion with oil continuous phase from shore to supply vessels and from supply vessels to offshore platforms and drilling rigs. A tough, flexible, crush and kink resistant construction for long service life in the most arduous working conditions.

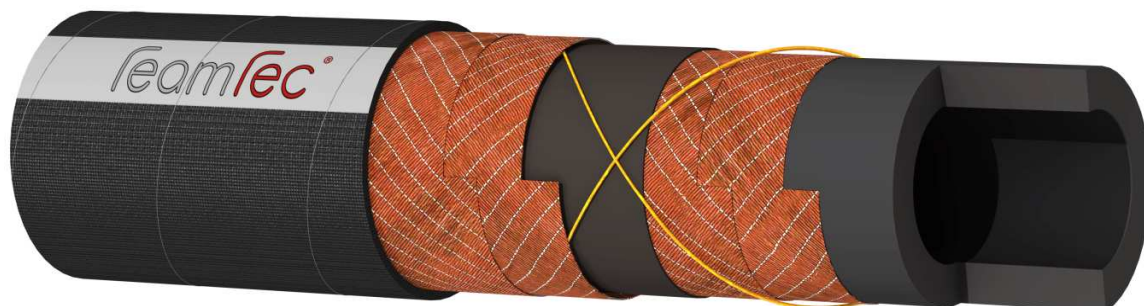

Construction:

Tube: black, smooth, thick NBR antistatic rubber resistant to abrasion and to oil and petroleum products with up to 50% aromatics content.

Reinforcement: multiple layers of synthetic cord plies embedded into layers of synthetic rubber and antistatic copper wires.

Cover: black, smooth (cloth finish) CR rubber wear, oil, lubricants, heat and ageing resistant. Antistatic.

Fire resistant cover to ISO 15540:1999 specs (+800°C / +1472°F for 30 minutes).

Working temperature: -30°C to +100°C (-22°F to +212°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
51	2	69	2.71	20	300	80	1200	2.35	1.58	61	200
76	3	96	3.78	20	300	80	1200	3.65	2.45	61	200
102	4	124	4.88	20	300	80	1200	5.25	3.53	61	200
127	5	150	5.91	20	300	80	1200	6.89	4.63	61	200
152	6	176	5.93	20	300	80	1200	8.27	5.55	61	200
203	8	229	9.02	20	300	80	1200	11.91	8.00	18.3	60

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.