


# OIL RIG - Potable Water 300 D

## Application/service:

Used in the offshore petroleum industry to transfer potable water for human consumption from shore to supply vessels and from supply vessels to offshore platforms and drilling rigs. A tough, flexible, crush and kink resistant construction for long service life in the most arduous working conditions.

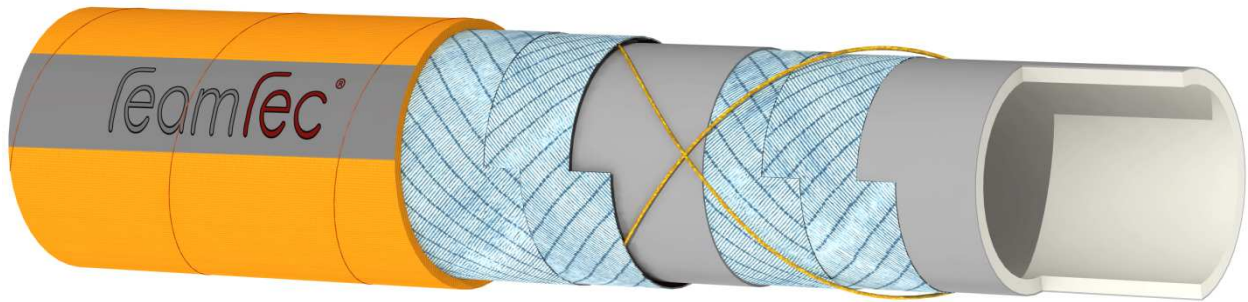

## Construction:

**Tube:** white, smooth EPDM rubber, food quality to FDA title 21 item 177.2600 and BGA-BGvV XXI cat.2

**Reinforcement:** multiple layers of synthetic cord plies embedded into layers of synthetic rubber and antistatic copper wires.

**Cover:** orange, smooth (cloth finish) CR rubber wear, oil, lubricants, heat and ageing resistant.

**Fire resistant cover to ISO 15540:1999 specs (+80°C / +1472°F for 30 minutes).**

**Working temperature:** -30°C to +90°C (-22°F to +194°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
51	2	68	2.68	20	300	80	1200	1.96	1.32	61	200
76	3	94	3.70	20	300	80	1200	3.05	2.05	61	200
102	4	122	4.80	20	300	80	1200	4.54	3.05	61	200

Other dimensions and pressures available on request.

\* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.