
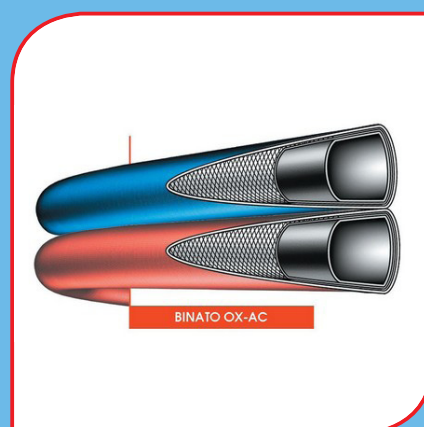


81 - RUBBER HOSE

COMPRESSED AIR AND NON-CORROSIVE FLUIDS	2
WATER, AIR AND NON-CORROSIVE FLUIDS	5
ABRASIVE MATERIAL	9
PETROLEUM PRODUCTS	14
HOT WATER, STEAM AND HOT AIR	16
GAS WELDING	19
FOOD AND BEVERAGES	21
CHEMICAL PRODUCTS	24
SUCTION OF AIR, FUMES AND DUSTS	28
HIGH PRESSURE HOSE - HYDRAULIC HOSE	29

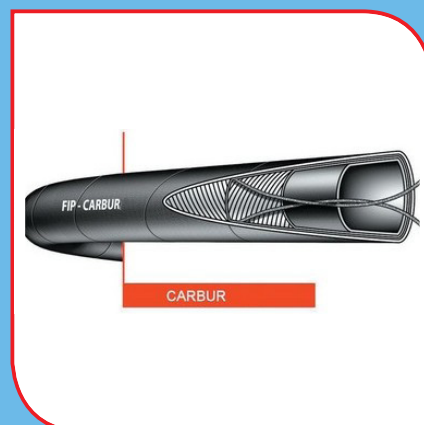

CATALOGUE

www.teamtec.com

Ed. 01/2013



COMPRESSED AIR AND NON-CORROSIVE FLUIDS

ROTARY DRILL **Compressed Air**

For compressed air service, oil mist resistant. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ROTARY DRILL/20 13X23 1/2 MT.40	20	60	0,38	40	120
TUBO G ROTARY DRILL/20 16X26 5/8 MT.40	20	60	0,36	40	120
TUBO G ROTARY DRILL/20 19X30 3/4	20	60	0,54	40/60	120
TUBO G ROTARY DRILL/20 25X37 1"	20	60	0,78	40/60	120
TUBO G ROTARY DRILL/35 19X32 3/4 MT. 40	25	75	0,6	40	120
TUBO G ROTARY DRILL/35 19X32 3/4 MT. 60	25	75	0,6	60	120
TUBO G ROTARY DRILL/35 25X39 1"	25	75	0,85	40/60	120

PALE MECCANICHE/25 **Compressed Air**

For compressed air service, oil mist resistant. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G PALE MECCANICHE/25 32X48	25	75	1,07	40/60	120
TUBO G PALE MECCANICHE/25 38X54	25	75	1,52	40/60	120
TUBO G PALE MECCANICHE/25 50X69	25	75	2,3	40/60	120
TUBO G PALE MECCANICHE/25 50X71	25	75	2,5	40/60	120

CARRO PONTE/25 **Compressed Air**

For compressed air service, oil mist resistant. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G CARROPONTE/25 76X 98	25	75	3,34	40/60	120
TUBO G CARROPONTE/25 100X128	25	75	5,01	40/60	120
TUBO G CARROPONTE/25 150X182	25	75	8,5	40/60	120



TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C




RUBBER HOSE - 81

ROTARY FLEX Compressed Air



Light weight, layflat compressed air hose, oil mist resistant. Yellow nitrile rubber tube. High strength textile reinforcement. Ribbed yellow rubber cover weather, ozone and abrasion resistant. Temperature range: -20°C to +80°C. Other dimensions, length, colors and pressure available on request.

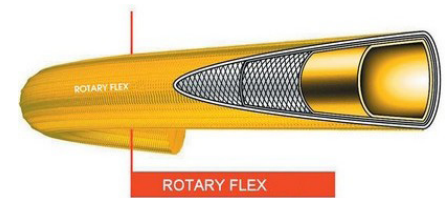Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ROTARY FLEX 19 (25 BAR)	25	75	0,15	60	120
TUBO G ROTARY FLEX 25 (25 BAR)	25	75	0,21	60	120
TUBO G ROTARY FLEX 38 (20 BAR)	20	60	0,44	60	120
TUBO G ROTARY FLEX 51 (17 BAR)	17	51	0,65	60	120



VIBRATORI/10 Compressed Air Non-Corrosive Fluids



For compressed air and non corrosive fluids used on concrete vibrators. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G VIBRATORI/10 19X31	10	30	0,3	40	120
TUBO G VIBRATORI/10 25X39	10	30	0,6	40	120
TUBO G VIBRATORI/10 25X42	10	30	0,75	40	120
TUBO G VIBRATORI/10 28X40	10	30	0,7	40	120
TUBO G VIBRATORI/10 32X48	10	30	0,8	40	120



SUPERMONDIAL Compressed Air Non-Corrosive Fluids Water

For delivery of compressed air, water and non corrosive fluids. TIPRENE elastomer black, smooth tube with high mechanical characteristics, air tight. Polyester yarn reinforcement. Black, smooth TIPRENE elastomer cover abrasion and ageing resistant. Long length construction. Temperature range: -20°C to +60°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G SUPERMONDIAL/10 5X10,5	10	30	0,09	100	100
TUBO G SUPERMONDIAL/10 8X15	10	30	0,16	100	100
TUBO G SUPERMONDIAL/10 10X17	10	30	0,18	100	100
TUBO G SUPERMONDIAL/10 12X17	10	30	0,14	100	100
TUBO G SUPERMONDIAL/10 13X19	10	30	0,19	100	100
TUBO G SUPERMONDIAL/10 15X21	10	30	0,21	100	100
TUBO G SUPERMONDIAL/10 16X23	10	30	0,27	100	100
TUBO G SUPERMONDIAL/10 19X26	10	30	0,31	100	100
TUBO G SUPERMONDIAL/10 20X30	10	30	0,5	50	100





TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE




Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G SUPERMONDIAL/10 22X30	10	30	0,41	50	100
TUBO G SUPERMONDIAL/10 25X35	10	30	0,6	50	100
TUBO G SUPERMONDIAL/20 6X14	20	60	0,16	100	100
TUBO G SUPERMONDIAL/20 8X17	20	60	0,22	100	100
TUBO G SUPERMONDIAL/20 10X19	20	60	0,26	100	100
TUBO G SUPERMONDIAL/20 13X23	20	60	0,36	100	100
TUBO G SUPERMONDIAL/20 16X26	20	60	0,42	100	100
TUBO G SUPERMONDIAL/20 19X30	20	60	0,54	50	100
TUBO G SUPERMONDIAL/20 25X37	20	60	0,743	50	100



SUPERMONDIAL/10 RACCORDATO - With swaged fittings

Compressed Air Non-Corrosive Fluids Water

For delivery of compressed air, water and non corrosive fluids. TIPRENE elastomer black, smooth tube with high mechanical characteristics, air tight. Polyester yarn reinforcement. Black, smooth TIPRENE elastomer cover abrasion and ageing resistant. Supplied complete with swaged-on Geka fittings at each end. Long length construction. Temperature range: -20°C to +60°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G SUPERMONDIAL/10 13X19X 5000 P	10	30	0,19	1
TUBO G SUPERMONDIAL/10 13X19X10000 P	10	30	0,19	1
TUBO G SUPERMONDIAL/10 13X19X15000 P	10	30	0,19	1
TUBO G SUPERMONDIAL/10 13X19X20000 P	10	30	0,19	1
TUBO G SUPERMONDIAL/10 19X26X20000 P	10	30	0,31	1
TUBO G SUPERMONDIAL/10 19X26X25000 P	10	30	0,31	1
TUBO G SUPERMONDIAL/10 19X26X50000 P	10	30	0,31	1



MONDIAL/20/ST GIALLO

Compressed Air Non-Corrosive Fluids Water

For delivery of compressed air, water and non corrosive fluids. TIPRENE elastomer black, smooth tube with high mechanic characteristics, air tight. Polyester yarn reinforcement. Yellow, smooth TIPRENE elastomer cover abrasion and ageing resistant. Long length construction. Temperature range: -20°C to + 60°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G MONDIAL/20/ST 19X28 GIALLO	20	60	0,54	60	120
TUBO G MONDIAL/20/ST 25X36 GIALLO	20	60	0,74	60	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

4

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.



RUBBER HOSE - 81



WATER, AIR AND NON-CORROSIVE FLUIDS

POMPE SOMMERSE

Industrial Water Non-Corrosive Fluids

Thin wall hose for delivery of water, industrial water and non corrosive fluids. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.





Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G POMPE SOMMERSE/ 5 203X211	5	15	3,08	40/60	120
TUBO G POMPE SOMMERSE/10 40X46	10	30	0,6	40/60	120
TUBO G POMPE SOMMERSE/10 50X56	10	30	0,7	40/60	120
TUBO G POMPE SOMMERSE/10 60X66	10	30	0,75	40/60	120
TUBO G POMPE SOMMERSE/10 70X77	10	30	0,85	40/60	120
TUBO G POMPE SOMMERSE/10 76X83	10	30	0,96	40/60	120
TUBO G POMPE SOMMERSE/10 80X87	10	30	1,1	40/60	120
TUBO G POMPE SOMMERSE/10 100X108	10	30	1,57	40/60	120
TUBO G POMPE SOMMERSE/10 120X129	10	30	1,85	40/60	120
TUBO G POMPE SOMMERSE/10 150X159	10	30	2,16	40/60	120
TUBO G POMPE SOMMERSE/10 200X212	10	30	5,03	40/60	120
TUBO G POMPE SOMMERSE/10 250X262	10	30	7,5	20	120
TUBO G POMPE SOMMERSE/20 50X58	20	60	0,8	40/60	120
TUBO G POMPE SOMMERSE/20 60X69	20	60	0,9	40/60	120
TUBO G POMPE SOMMERSE/20 80X91	20	60	1,35	40	120
TUBO G POMPE SOMMERSE/20 102X114	20	60	1,7	40/60	120
TUBO G POMPE SOMMERSE/20 120X132	20	60	2	40/60	120
TUBO G POMPE SOMMERSE/20 152X164	20	60	2,4	40/60	120
TUBO G POMPE SOMMERSE/20 203X222	20	60	5,5	20	120
TUBO G POMPE SOMMERSE/20 254X273	20	60	8,2	20	120

POMPE FLEX/15

Industrial Water Non-Corrosive Fluids

Light weight, layflat hose for delivery of water, industrial water and non corrosive fluids. Black/Yellow neoprene tube. High strength textile reinforcement. Ribbed black/yellow rubber cover weather, ozone and abrasion resistant. Temperature range: -20°C to +80°C. Other dimensions, length, colors and pressure available on request.




Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G POMPE FLEX/15 102 GIALLO	15	45	1,28	30/60	120
TUBO G POMPE FLEX/15 125 GIALLO	15	45	1,8	30/60	120
TUBO G POMPE FLEX/15 152 NERO	15	45	2,1	30/60	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

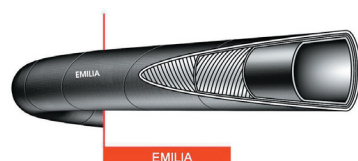81 - RUBBER HOSE



EMILIA Industrial Water Non-Corrosive Fluids



Delivery of water, industrial water and non corrosive fluids. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G EMILIA/10 13X19	10	30	0,22	40	120
TUBO G EMILIA/10 16X23	10	30	0,26	40	120
TUBO G EMILIA/10 19X26	10	30	0,29	40	120
TUBO G EMILIA/10 20X30	10	30	0,35	40	120
TUBO G EMILIA/10 22X30	10	30	0,3	40	120
TUBO G EMILIA/10 25X33	10	30	0,46	40	120
TUBO G EMILIA/10 25X35	10	30	0,53	40	120
TUBO G EMILIA/10 30X42	10	30	0,6	40	120
TUBO G EMILIA/10 32X44	10	30	0,76	40	120
TUBO G EMILIA/10 35X47	10	30	0,86	40	120
TUBO G EMILIA/10 38X52	10	30	1,2	40	120
TUBO G EMILIA/10 40X54	10	30	1,25	40	120
TUBO G EMILIA/10 50X64	10	30	1,6	40	120
TUBO G EMILIA/10 60X75	10	30	2,07	40	120
TUBO G EMILIA/20 8X 17	20	60	0,19	120	120
TUBO G EMILIA/20 10X 19	20	60	0,23	120	120
TUBO G EMILIA/20 12X 21	20	60	0,32	120	120



FIP-PADOVA/10 Industrial Water Non-Corrosive Fluids

Suction and delivery of water, industrial water and non corrosive fluids. Black, smooth synthetic rubber tube. Embedded steel wire helix. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, corrugated with textile finish. On stock in 2 and 3m lengths, with soft ends. Temperature range: -35°C to + 70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G FIP-PADOVA/10 80 DA MT. 2	5	15	Medium/Strong	460	2,3	2	120
TUBO G FIP-PADOVA/10 100	5	15	Medium/Strong	630	3,7	2/3	120
TUBO G FIP-PADOVA/10 120	5	15	Medium/Strong	840	4,6	2/3	120
TUBO G FIP-PADOVA/10 150	5	15	Medium/Strong	1060	7	2/3	120
TUBO G FIP-PADOVA/10 200 DA MT. 2	5	15	Medium/Strong	1600	10	2	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



RUBBER HOSE - 81

IRRIGAZIONE/10

Industrial Water Non-Corrosive Fluids

Suction and delivery of water, industrial water and non corrosive fluids. Black, smooth synthetic rubber tube. Embedded steel wire helix. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, corrugated with textile finish. Manufactured in rolls with soft ends every 2m and lazy spiral thru the muffs. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G IRRIGAZIONE/10 80	10	30	Strong	506	2,5	2/20	120
TUBO G IRRIGAZIONE/10 100	10	30	Strong	690	4,1	2/20	120
TUBO G IRRIGAZIONE/10 120	10	30	Medium	920	5,1	2/20	120
TUBO G IRRIGAZIONE/10 150	10	30	Medium	1170	7,7	2/20	120
TUBO G IRRIGAZIONE/10 200	10	30	Medium	1760	11	2/20	120

SCRIVIA/10

Industrial Water Non-Corrosive Fluids

Suction and delivery of water, industrial water and non corrosive fluids. Black, smooth synthetic rubber tube. Embedded steel wire helix. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G SCRIVIA/10 30X40 #	10	30	Strong	120	0,9	40	120
TUBO G SCRIVIA/10 32X42	10	30	Strong	130	0,97	40	120
TUBO G SCRIVIA/10 35X45	10	30	Strong	140	1,1	40	120
TUBO G SCRIVIA/10 40X51	10	30	Strong	150	1,3	40	120
TUBO G SCRIVIA/10 45X57	10	30	Strong	180	1,45	40	120
TUBO G SCRIVIA/10 50X62	10	30	Strong	200	1,7	40	120
TUBO G SCRIVIA/10 60X72,5	10	30	Strong	240	2,2	40	120
TUBO G SCRIVIA/10 70X84,5	10	30	Strong	280	2,6	40	120
TUBO G SCRIVIA/10 76X90,5	10	30	Strong	340	2,8	40	120
TUBO G SCRIVIA/10 80X94,5	10	30	Strong	370	3,3	40	120
TUBO G SCRIVIA/10 90X106,5	10	30	Strong	450	4	40	120
TUBO G SCRIVIA/10 100X116	10	30	Strong	510	4,5	40	120
TUBO G SCRIVIA/10 120X138 #	10	30	Medium	600	7,5	20	120
TUBO G SCRIVIA/10 150X172	10	30	Medium	830	10,2	20	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE





VIGNETO

Industrial Water

Herbicide

Delivery of industrial water, herbicides, fungicidal etc. Black, smooth synthetic rubber tube. Embedded steel wire helix. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G VIGNETO/ 75 10X19 IN ROT.DA MT.40	75	225	0,22	40	120
TUBO G VIGNETO/ 75 10X21 IN ROT.DA MT.40	75	225	0,25	40	120
TUBO G VIGNETO/ 75 16X27 IN ROT.DA MT.40	75	225	0,51	40	120
TUBO G VIGNETO/ 75 19X31 IN ROT.DA MT.40	75	225	0,59	40	120
TUBO G VIGNETO/100 10X21 IN ROT.DA MT.40	100	300	0,28	40	120
TUBO G VIGNETO/100 13X24 IN ROT.DA MT.40	100	300	0,45	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

8



We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.



ABRASIVE MATERIAL

SABBIATRICE/10 Abrasive Materials



For delivery of silica sand, steel grit and other abrasive materials. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G SABBIATRICE/10 13X25	10	30	0,39	40	120
TUBO G SABBIATRICE/10 19X34	10	30	0,52	40	120
TUBO G SABBIATRICE/10 25X40	10	30	0,77	40	120
TUBO G SABBIATRICE/10 30X45	10	30	1,05	40	120
TUBO G SABBIATRICE/10 32X48	10	30	1,07	40	120



SABBIATRICE/20 Abrasive Materials

For delivery of silica sand, steel grit and other abrasive materials. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G SABBIATRICE/20 25X40	20	60	0,8	40	120
TUBO G SABBIATRICE/20 32X48	20	60	1,1	40	120



FORACEM/18/L Cellular Concrete

For delivery of cellular concrete and gunite. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G FORACEM/18/L 60X70,5	18	54	1,8	40	120



TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE



DON / 10

DON/10 Abrasive Materials

For delivery of abrasive aggregates such as sand, gravel, cement. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -25°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G DON/10 102X118	10	30	3,36	20	40



DON / 10 PM

DON/10 P.M. Abrasive Materials

For delivery of abrasive aggregates such as sand, gravel, cement. Tan gum smooth rubber tube very high abrasion resistant. High tensile synthetic plies. Antistatic copper wire. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -25°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G DON/10 102X118 P.M.	10	30	3,36	40	120



DON / 10 SPIR

DON-SPIR/10 Abrasive Materials

For suction and delivery of abrasive aggregates such as sand, gravel, cement. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Embedded steel wire helix. Black, synthetic rubber cover weather, ozone and, abrasion resistant, antistatic, smooth with textile finish. Temperature range: -25°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G DON-SPIR/10 80X94	10	30	2,9	40	120
TUBO G DON-SPIR/10 102X118	10	30	4,03	40	120



GSB / 12

GSB Gunite Foundations

For delivery of gunite and other materials for foundations. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G GSB/12 50X71	12	36	1,6	40	120
TUBO G GSB/12 60X82	12	36	2,2	40	120
TUBO G GSB/20 65X85	20	60	2,5	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



RUBBER HOSE - 81

GSB/20 - With fittings

Gunite Foundations

For delivery of gunite and other materials for foundations. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, smooth with textile finish. Complete with GSB or CARDAN fittings. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G GSB/20 65X85X10000 CARDAN	20	60	2,5	4
TUBO G GSB/20 65X85X13300 CARDAN	20	60	2,5	3
TUBO G GSB/20 65X85X20000 CARDAN	20	60	2,5	2
TUBO G GSB/20 65X85X13300 GSB FASC.	20	60	2,5	3
TUBO G GSB/20 65X85X13300 GSB PRESS.	20	60	2,5	3



BETONE/40

Plaster

For high pressure delivery of plaster. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G BETONE/40 25X37	40	120	0,68	40	120
TUBO G BETONE/40 35X48	40	120	0,95	40	120
TUBO G BETONE/40 40X55	40	120	1,25	40	120
TUBO G BETONE/40 50X69	40	120	1,7	40	120



BETONE/40 - With fittings

Plaster

For high pressure delivery of plaster. Black, smooth rubber tube very high abrasion resistant, antistatic. High tensile synthetic plies. Black, synthetic rubber cover weather, ozone and, abrasion resistant, smooth with textile finish. Complete with swaged-on Plaster fittings Male and Female with handles (M+F) of Male and Male threaded (M+M). Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G BETONE/40 25X37X 5000 M+F PRESS.	40	120	0,68	1
TUBO G BETONE/40 25X37X 5000 M+M1"PRESS	40	120	0,68	1
TUBO G BETONE/40 25X37X10000 M+F PRESS.	40	120	0,68	1
TUBO G BETONE/40 25X37X10000 M+M1"PRESS	40	120	0,68	1
TUBO G BETONE/40 25X37X15000 M+F PRESS.	40	120	0,68	1
TUBO G BETONE/40 25X37X15000 M+M1"PRESS	40	120	0,68	1
TUBO G BETONE/40 25X37X20000 M+F PRESS	40	120	0,68	1
TUBO G BETONE/40 25X37X20000 M+M1"PRESS	40	120	0,68	1



TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE



PERISTALTICA Abrasive Materials Plaster


Thick wall hose specially designed for use with plaster and other abrasive materials handled by peristaltic pumps. Black, smooth rubber tube very high abrasion resistant. High tensile synthetic plies. Black rubber cover abrasion resistant, smooth with textile finish. Other dimensions, length, colors and pressure available on request.

Descrizione

TUBO G PERISTALTICA 26X 56X 800



10

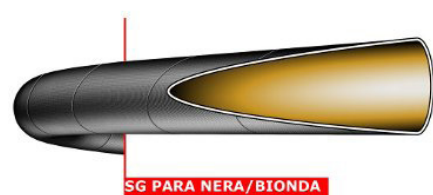

SG PARA NERA/BIONDA

SG PARA/NERA-BIONDA Abrasive Materials

Para rubber tubing mainly used as sleeve on silos for gravity discharge. Tan para rubber tube, smooth, black rubber cover, smooth with textile finish. Other dimensions, length and colors available on request.

Descrizione

Working Press. bar



Descrizione	Working Press. bar		
TUBO G SG PARA/NERA-BIONDA 168X174	1,85	5	120
TUBO G SG PARA/NERA-BIONDA 200X209	3,32	5	120
TUBO G SG PARA/NERA-BIONDA 220X229	3,65	5	120
TUBO G SG PARA/NERA-BIONDA 250X259	4,14	5	120
TUBO G SG PARA/NERA-BIONDA 273X282	4,5	5	120
TUBO G SG PARA/NERA-BIONDA 280X290	5,15	5	120
TUBO G SG PARA/NERA-BIONDA 300X309	4,95	5	120
TUBO G SG PARA/NERA-BIONDA 323X332	5,32	5	120
TUBO G SG PARA/NERA-BIONDA 350X359	5,76	5	120
TUBO G SG PARA/NERA-BIONDA 400X409	6,57	5	120
TUBO G SG PARA/NERA-BIONDA 500X509	8,2	5	120
TUBO G SG PARA/NERA-BIONDA 600X610	10,92	5	120



CONCRETE / 80D

CONCRETE/80D Concrete



Concrete placement hose for concrete pumps and palification. Black, smooth conductive rubber tube very high abrasion resistant. Steel wires reinforcement. Black rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Usually supplied in lengths of 3,4,5 and 6m with swaged-on full flow Victaulic fittings. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Bending radius mm	Weight kg/m		
TUBO G CONCRETE/80D 3" L.MT. 3	80	200	400	6,2	1	10
TUBO G CONCRETE/80D 3" L.MT. 4	80	200	400	6,2	1	10
TUBO G CONCRETE/80D 3" L.MT. 5	80	200	400	6,2	1	10
TUBO G CONCRETE/80D 3"1/4 L.MT. 3	80	200	450	6,6	1	10

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



RUBBER HOSE - 81

Descrizione	Working Press. bar	Bursting Press. bar	Bending radius mm	Weight kg/m		
TUBO G CONCRETE/80D 3"1/4 L.MT. 4	80	200	450	6,6	1	10
TUBO G CONCRETE/80D 3"1/4 L.MT. 5	80	200	450	6,6	1	10
TUBO G CONCRETE/80D 4" L.MT. 3	80	200	550	7,83	1	10
TUBO G CONCRETE/80D 4" L.MT. 4	80	200	550	7,83	1	10
TUBO G CONCRETE/80D 4" L.MT. 5	80	200	550	7,83	1	10
TUBO G CONCRETE/80D 4" L.MT. 6	80	200	550	7,83	1	10
TUBO G CONCRETE/80D 4"1/2 L.MT. 3	80	200	630	8,7	1	10
TUBO G CONCRETE/80D 4"1/2 L.MT. 4	80	200	630	8,7	1	10
TUBO G CONCRETE/80D 4"1/2 L.MT. 5	80	200	630	8,7	1	10
TUBO G CONCRETE/80D 5" L.MT. 3	80	200	700	9,54	1	10
TUBO G CONCRETE/80D 5" L.MT. 4	80	200	700	9,54	1	10
TUBO G CONCRETE/80D 5" L.MT. 5	80	200	700	9,54	1	10
TUBO G CONCRETE/80D 5" L.MT. 6	80	200	700	9,54	1	10
TUBO G CONCRETE/80D 5"1/2 L.MT. 4	80	200	750	12,24	1	10
TUBO G CONCRETE/80D 5"1/2 L.MT. 5	80	200	750	12,24	1	10

SPIRALSABBIA/M8

Abrasive Materials Concrete

For delivery and medium suction of abrasive materials such as concrete, sand, gravel etc. Black, smooth rubber tube very high abrasion resistant. High tensile synthetic plies. Embedded steel wire helix. Black, synthetic rubber cover weather, ozone and, abrasion resistant, corrugated with textile finish. Usually supplied with soft ends. Also available on request with smooth, textile finish cover. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction
TUBO G SPIRALSABBIA/M8	8	24	Low



SPIRALSABBIA / M8

SPIRALSABBIA/A

Abrasive Materials Concrete

For heavy duty suction of abrasive materials such as concrete, sand, gravel etc. Black, smooth rubber tube very high abrasion resistant. High tensile synthetic plies. Embedded steel wire helix. Black, synthetic rubber cover weather, ozone and, abrasion resistant, corrugated with textile finish. Usually supplied with soft ends. Also available on request with smooth, textile finish cover. Temperature range: -30°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction
TUBO G SPIRALSABBIA/A	1	3	Strong



SPIRALSABBIA / A

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.



PETROLEUM PRODUCTS



CARBUR Petroleum Products

Delivery of petroleum products such as gasoline, diesel oil, mineral oil etc. with max 50% aromatic content. Black, smooth NBR tube. High tensile synthetic plies and antistatic copper wire. Black, synthetic rubber cover resistant to petroleum products, weather, ozone and abrasion, smooth with textile finish. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G CARBUR/10 D. 19X27	10	30	0,36	40/60	120
TUBO G CARBUR/10 D. 25X35	10	30	0,62	40/60	120
TUBO G CARBUR/10 D. 30X40	10	30	0,76	40/60	120
TUBO G CARBUR/10 D. 35X45	10	30	0,8	40/60	120
TUBO G CARBUR/10 D. 40X50	10	30	0,82	40/60	120
TUBO G CARBUR/10 D. 45X55	10	30	0,94	40/60	120
TUBO G CARBUR/10 D. 50X60	10	30	1,06	40/60	120
TUBO G CARBUR/20 D. 19X32	20	60	0,42	40/60	120
TUBO G CARBUR/20 D. 25X38	20	60	0,66	40/60	120
TUBO G CARBUR/20 D. 32X46	20	60	0,89	40/60	120
TUBO G CARBUR/20 D. 38X53	20	60	1,04	40/60	120



SPIRALCARBUR/10 Petroleum Products

Suction and delivery of petroleum products such as gasoline, diesel oil, mineral oil etc. with max 50% aromatic content. Black, smooth NBR tube. High tensile synthetic plies and antistatic copper wire. Embedded steel wire helix. Black, synthetic rubber cover resistant to petroleum products, weather, ozone and abrasion, smooth with textile finish. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G SPIRALCARBUR/10 25X 35	10	30	Medium	105	0,68	40	120
TUBO G SPIRALCARBUR/10 30X 41	10	30	Medium	120	0,72	40	120
TUBO G SPIRALCARBUR/10 35X 47	10	30	Medium	145	0,87	40	120
TUBO G SPIRALCARBUR/10 40X 52	10	30	Medium	150	0,95	40	120
TUBO G SPIRALCARBUR/10 45X 57	10	30	Medium	185	1,28	40	120
TUBO G SPIRALCARBUR/10 50X 63	10	30	Medium	230	1,49	40	120
TUBO G SPIRALCARBUR/10 60X 73,5	10	30	Medium	290	2,29	40	120
TUBO G SPIRALCARBUR/10 76X 90	10	30	Medium	360	2,76	40	120
TUBO G SPIRALCARBUR/10 80X 96,5	10	30	Medium	400	3,20	40	120
TUBO G SPIRALCARBUR/10 102X118	10	30	Medium	515	4,65	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C





RUBBER HOSE - 81

CARBUR/ST

Petroleum Products

Long length hose for delivery of gasoline, diesel oil; not suitable for lead free gasoline. Black, smooth nitrile tube with excellent mechanical characteristics. Textile braided yarn reinforcement. Black smooth synthetic rubber cover resistant to petroleum products, abrasion and ageing. Antistatic value: $R < 1 \text{ M}\Omega$. Temperature range: -20°C to $+60^{\circ}\text{C}$. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G CARBUR/10/ST D. 5X12	10	30	0,12	60	300
TUBO G CARBUR/10/ST D. 6X12	10	30	0,1	60	300
TUBO G CARBUR/10/ST D. 8X15	10	30	0,16	60	300
TUBO G CARBUR/10/ST D. 10X17	10	30	0,19	60	300
TUBO G CARBUR/10/ST D. 13X20	10	30	0,23	60	300
TUBO G CARBUR/10/ST D. 15X23	10	30	0,3	60	300
TUBO G CARBUR/10/ST D. 19X27	10	30	0,37	60	300
TUBO G CARBUR/10/ST D. 25X35	10	30	0,6	60	300
TUBO G CARBUR/20/ST D. 6X14	20	60	0,16	60	300
TUBO G CARBUR/20/ST D. 8X17	20	60	0,23	60	300
TUBO G CARBUR/20/ST D. 10X19	20	60	0,27	60	300

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF $+18^{\circ}\text{C}$

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE





HOT WATER, STEAM AND HOT AIR

AUTO

Hot Water Non Corrosive Fluids

For delivery of water and anti-freeze liquids on engine cooling system. Black smooth synthetic rubber tube heat resistant. High tensile synthetic plies. Black synthetic rubber cover heat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +100°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G AUTO 18X24	3	9	0,23	1/40	120
TUBO G AUTO 20X26	3	9	0,3	1/40	120
TUBO G AUTO 22X28	3	9	0,32	1/40	120
TUBO G AUTO 25X32	3	9	0,35	1/40	120
TUBO G AUTO 28X36	3	9	0,4	1/40	120
TUBO G AUTO 30X38	3	9	0,52	1/40	120
TUBO G AUTO 32X40	3	9	0,55	1/40	120
TUBO G AUTO 35X43	3	9	0,6	1/40	120
TUBO G AUTO 38X47	3	9	0,73	1/40	120
TUBO G AUTO 40X49	3	9	0,77	1/40	120
TUBO G AUTO 42X51	3	9	0,8	1/40	120
TUBO G AUTO 45X54	3	9	0,97	1/40	120
TUBO G AUTO 50X60	3	9	1,1	1/40	120
TUBO G AUTO 55X65	3	9	1,2	1/40	120
TUBO G AUTO 60X70	3	9	1,25	1/40	120
TUBO G AUTO 65X76	3	9	1,4	1/40	120
TUBO G AUTO 70X81	3	9	1,45	1/40	120
TUBO G AUTO 75X87	3	9	1,55	1/40	120
TUBO G AUTO 80X92	3	9	1,7	1/40	120
TUBO G AUTO 90X102	3	9	1,9	1/40	120
TUBO G AUTO 100X113	3	9	2,2	1/40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C





RUBBER HOSE - 81

ABANO/10

Hot Water

Non Corrosive Fluids

Delivery of hot water and non corrosive fluids. Black smooth synthetic rubber tube high temperature resistant. High tensile synthetic plies. Black synthetic rubber cover heat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35 to 120°C. Othe dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ABANO/10 10X20	10	30	0,3	40/60	120
TUBO G ABANO/10 12X22	10	30	0,34	40/60	120
TUBO G ABANO/10 15X25	10	30	0,4	40/60	120
TUBO G ABANO/10 20X30	10	30	0,42	40/60	120
TUBO G ABANO/10 25X35	10	30	0,58	40/60	120
TUBO G ABANO/10 30X41	10	30	0,8	40/60	120
TUBO G ABANO/10 35X48	10	30	0,86	40/60	120
TUBO G ABANO/10 40X54	10	30	0,97	40/60	120
TUBO G ABANO/10 45X61	10	30	1,3	40/60	120
TUBO G ABANO/10 50X68	10	30	1,64	40/60	120
TUBO G ABANO/10 60X82	10	30	2,02	40/60	120



LARDERELLO/7/170

Steam

Steam hose suitable for max +164°C. Black smooth synthetic rubber tube steam resistant. High tensile synthetic plies. Black synthetic rubber cover heat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to 165°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G LARDERELLO/7/170 10X21	7	70	0,3	40	120
TUBO G LARDERELLO/7/170 12X23	7	70	0,4	40	120
TUBO G LARDERELLO/7/170 15X26	7	70	0,51	40	120
TUBO G LARDERELLO/7/170 19X31	7	70	0,58	40	120
TUBO G LARDERELLO/7/170 20X33	7	70	0,62	40	120
TUBO G LARDERELLO/7/170 25X37	7	70	0,72	40	120
TUBO G LARDERELLO/7/170 30X45	7	70	1	40	120
TUBO G LARDERELLO/7/170 35X50	7	70	1,2	40	120
TUBO G LARDERELLO/7/170 40X56	7	70	1,3	40	120
TUBO G LARDERELLO/7/170 51X67	7	70	1,68	40	120



TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE





VAPOFER

VAPOFER/17/210

Steam

For saturated steam. Black smooth synthetic rubber tube steam resistant. Steel wires reinforcement. Black or red synthetic rubber cover heat, weather, ozone and abrasion resistant; it is pin-pricked. Smooth cover with textile finish. Temperature range: -40°C to +210°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G VAPOFER/17/210 10X21 COP.ROSSA	17	170	0,53	60	120
TUBO G VAPOFER/17/210 19X32 COP.ROSSA	17	170	0,68	60	120
TUBO G VAPOFER/17/210 25X38 COP.ROSSA	17	170	0,9	60	120
TUBO G VAPOFER/17/210 32X46,5 COP.ROSSA	17	170	1,3	60	120
TUBO G VAPOFER/17/210 38X54 COP.ROSSA	17	170	1,6	60	120
TUBO G VAPOFER/17/210 51X67 COP.ROSSA	17	170	2,2	60	120
TUBO G VAPOFER/17/210 60X78 COP.ROSSA	17	170	3,5	60	120





ARIA CALDA

ARIA CALDA/10/175

Hot Air

Hot air blower hose for truck compressor. Black smooth synthetic rubber tube high temperature resistant. High tensile synthetic plies. Black synthetic rubber cover heat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +175°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ARIA CALDA/10/175 76X 94 TD	10	30	2,6	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



GAS WELDING

OSSIGENO/10 TOP

Welding

Oxygen delivery hose for gas welding. Black, smooth synthetic rubber tube. Textile braided yarn reinforcement. Blue, smooth synthetic rubber cover weather and abrasion resistant. Long length construction. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G OSSIGENO/10 6X13 TOP	10	30	0,12	50
TUBO G OSSIGENO/10 8X15 TOP	10	30	0,19	50



OSSIGENO / 10 - 20

ACETILENE/10 TOP

Welding

Acetylene delivery hose for gas welding. Black, smooth synthetic rubber tube. Textile braided yarn reinforcement. Red, smooth synthetic rubber cover weather and abrasion resistant. Long length construction. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G ACETILENE/10 6X13 TOP	10	30	0,12	50
TUBO G ACETILENE/10 8X15 TOP	10	30	0,19	50



ACETILENE / 10

PROPANO/20

Propane delivery hose for gas welding. Black, smooth synthetic rubber NBR/SBR tube. Textile braided yarn reinforcement. Orange, smooth synthetic rubber cover weather and abrasion resistant. Long length construction. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G PROPANO/20/ARANCIO 8X16,5	20	60	0,22	100




PROPANO / 20

BINATO OX-AC

Welding

Welded oxygen and acetylene delivery hose for gas welding. Black, smooth synthetic rubber tube. Textile braided yarn reinforcement. Blue (oxygen) and red (acetylene) synthetic cover weather and abrasion resistant. Long length construction. Temperature range: -20°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G BINATO OX-AC 5X10,5	20	60	0,25	100
TUBO G BINATO OX-AC 5X10,5 MT50	20	60	0,25	50
TUBO G BINATO OX-AC 6X13	20	60	0,25	100

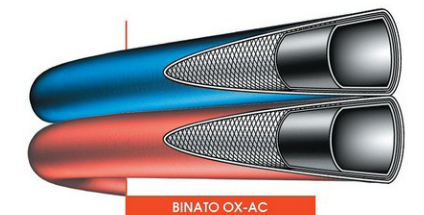


BINATO OX-AC


TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G BINATO OX-AC 6X13 TOP	20	60	0,25	40
TUBO G BINATO OX-AC 8X14 TOP	20	60	0,4	50

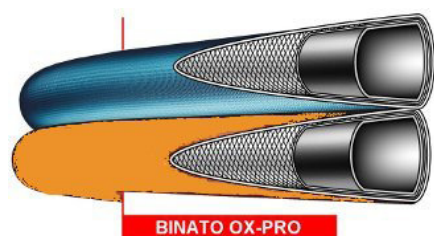

BINATO OX-PRO

Welding

Welded oxygen and propane delivery hose for gas welding. Black, smooth synthetic rubber tube. Textile braided yarn reinforcement. Blue (oxygen) and orange (propane) synthetic cover weather and abrasion resistant. Long length construction. Temperature range: -20°C to + 70°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m	
TUBO G BINATO OX-PRO 8X15	20	60	0,4	100



PROTEZIONE CAVI

Cable Covering

For the covering and protection of electric cables, excellent for the covering of welding torches. Textile lining, black rubber cover with textile finish. Temperature range: -35°C to +100°C. Other dimensions, length and colors available on request.

Descrizione	Weight kg/m		
TUBO G PROT.CAVI 25X 27	0,1	40	120
TUBO G PROT.CAVI 28X 31	0,1	40	120
TUBO G PROT.CAVI 32X 35	0,12	40	120
TUBO G PROT.CAVI 38X 41	0,15	40	120
TUBO G PROT.CAVI 40X 43	0,16	40	120
TUBO G PROT.CAVI 50X 53	0,24	40	120



TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C




FOOD AND BEVERAGES

PROSECCO/10 Food and Beverages



For delivery of potable water, alcoholic drinks, fruit juices and other non fatty alimentary drinks. White, smooth tube food quality tube to FDA and European specifications. High tensile synthetic plies. Red synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to 70°C. Other dimensions, length, colors and pressure available on request.

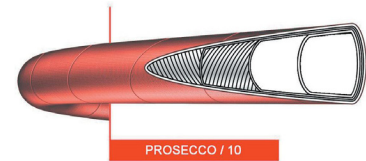Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G PROSECCO/10 16X23	10	30	0,45	40	120
TUBO G PROSECCO/10 30X41	10	30	0,9	40	120
TUBO G PROSECCO/10 60X82	10	30	3,75	40	120
TUBO G PROSECCO/10 80X105	10	30	4,3	40	120
TUBO G PROSECCO/10 100X123	10	30	6,34	40	120



PROSECCO/10 SP Food and Beverages



For suction and delivery of potable water, alcoholic drinks, fruit juices and other non oily alimentary liquids. White, smooth tube food quality tube to FDA and European specifications. High tensile synthetic plies. Embedded steel wire helix. Red synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -35°C to +70°C. Other dimensions, length, colors and pressure available on request.


Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G PROSECCO/10 SP 40X53	10	30	Strong	160	1,4	40	120
TUBO G PROSECCO/10 SP 63,5X81	10	30	Strong	300	2,85	40	120
TUBO G PROSECCO/10 SP 76X93	10	30	Strong	350	3,5	40	120
TUBO G PROSECCO/10 SP 102X120	10	30	Strong	500	5,1	40	120



ALIFOOD/10 Food and Beverages

Premium quality hose for delivery of potable water, beer, vintage wine, alcoholic drinks and distilled drinks and other non oily alimentary liquids. White, smooth odourless and taste-free tube food quality tube to FDA and European specifications. High tensile synthetic plies. Red synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +120°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ALIFOOD/10 25X35	10	30	0,74	40	120
TUBO G ALIFOOD/10 40X53	10	30	1,59	40	120
TUBO G ALIFOOD/10 102X130	10	30	6,29	40	120

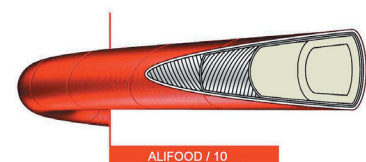

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE



ALIFOOD / 10 SP

ALIFOOD/10/SP Food and Beverages

Premium quality hose for suction and delivery of potable water, beer, vintage wine, alcoholic drinks and distilled drinks and other non oily alimentary liquids. White, smooth odourless and taste-free tube food quality tube to FDA and European specifications. High tensile synthetic plies. Embedded steel wire helix. Red synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +120°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ALIFOOD/10/SP 25X35	10	30	Strong	100	0,77	40	120
TUBO G ALIFOOD/10/SP 40X53	10	30	Strong	160	1,34	40	120
TUBO G ALIFOOD/10/SP 51X65	10	30	Strong	200	1,76	40	120



ALIMENTARI / 10

ALIMENTARI/10 - Food/10 Food and Beverages

For delivery of fatty and oily foods such as olive oil, dairy products, etc. White, smooth tube food quality tube to FDA and European specifications. High tensile synthetic plies. Blue synthetic rubber cover oil and fat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -15°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ALIMENTARI/10 25X38	10	30	0,8	40	120
TUBO G ALIMENTARI/10 40X60	10	30	1,9	40	120
TUBO G ALIMENTARI/10 51X66	10	30	2,11	40	120
TUBO G ALIMENTARI/10 102X126	10	30	6,43	40	120



ALIMENTARI / 10 SP

ALIMENTARI/10 SP - Food/10 SP Food and Beverages

For suction and delivery of fatty and oily foods such as olive oil, dairy products, etc. White, smooth tube food quality tube to FDA and European specifications. High tensile synthetic plies. Embedded steel wire helix. Blue synthetic rubber cover oil and fat, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -15°C to +70°C. Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ALIMENTARI/10/SPIR 30X42	10	30	Strong	120	1,02	40	120
TUBO G ALIMENTARI/10/SPIR 40X54	10	30	Strong	160	1,3	40	120
TUBO G ALIMENTARI/10/SPIR 102X122	10	30	Strong	500	6,1	40	120


TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C





RUBBER HOSE - 81

ATOCLEAN **Food and Beverages**

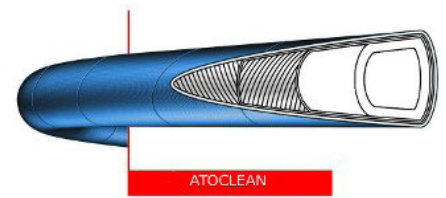For cleaning and sterilization of dairies, abattoirs and food industries in general. White, smooth synthetic rubber tube heat resistant. High tensile synthetic plies. Blue synthetic rubber cover weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +120°C. Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ATOCLEAN/10/BA-BL 13X24	10	30	0,42	40	120
TUBO G ATOCLEAN/10/BA-BL 19X30	10	30	0,63	40	120
TUBO G ATOCLEAN/15/BA-BL 15X26	15	45	0,5	40	120


TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.





CHEMICAL PRODUCTS

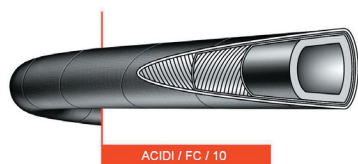ACIDI/FC/10 Chemical Products





Delivery of acids and basis, also at high concentration. Black, smooth synthetic rubber tube. High tensile synthetic plies. Black synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +120°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed. Not suitable for oils and organic products.** Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ACIDI/FC/10 20X29	10	40	0,58	40	120
TUBO G ACIDI/FC/10 25X34	10	40	0,68	40	120
TUBO G ACIDI/FC/10 30X42	10	40	1	40	120
TUBO G ACIDI/FC/10 35X48	10	40	1,3	40	120
TUBO G ACIDI/FC/10 40X55	10	40	1,55	40	120
TUBO G ACIDI/FC/10 45X62	10	40	1,65	40	120
TUBO G ACIDI/FC/10 51X65,5	10	40	1,85	40	120
TUBO G ACIDI/FC/10 60X76	10	40	2,3	40	120

ACIDI/10/LL Chemical Products



Suction and delivery of acids and basis, also at high concentration. Black, smooth synthetic rubber tube. High tensile synthetic plies. Embedded steel wire helix. Black synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -40°C to +120°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed. Not suitable for oils and organic products.** Other dimensions, length, colors and pressure available on request.


Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ACIDI/10/LL 40X54	10	40	Medium	280	1,72	40	120
TUBO G ACIDI/10/LL 60X75	10	40	Medium	450	3,2	40	120
TUBO G ACIDI/10/LL 76X90	10	40	Medium	600	4	40	120
TUBO G ACIDI/10/LL 80X95	10	40	Medium	650	4,5	40	120
TUBO G ACIDI/10/LL 90X105	10	40	Medium	800	5,2	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



MARGHERA/FC/10 Chemical Products

Suction and delivery of acids and basis, also at high concentration. Black, smooth synthetic rubber tube. High tensile synthetic plies. Embedded steel wire helix. Black synthetic rubber cover acids, weather, ozone and abrasion resistant, corrugated with textile finish. Temperature range: -40°C to +120°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed. Not suitable for oils and organic products.** Other dimensions, length, colors and pressure available on request.

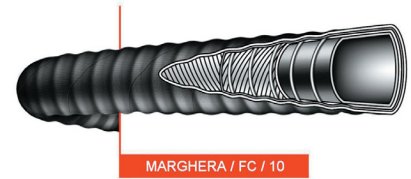

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G MARGHERA/FC/10 40	10	40	Medium/Strong	280	1,7	40	120
TUBO G MARGHERA/FC/10 50	10	40	Medium/Strong	350	2,3	40	120
TUBO G MARGHERA/FC/10 60	10	40	Medium/Strong	450	3	40	120
TUBO G MARGHERA/FC/10 70	10	40	Medium/Strong	550	3,6	40	120
TUBO G MARGHERA/FC/10 80	10	40	Medium/Strong	650	4,2	40	120

SUPERTOP/10 Chemical Products Petrochemical products

Delivery of a very wide range of chemical and petrochemical products including aromatic and aliphatic products. Smooth XLPE (cross-linked polyethylene) tube. High tensile synthetic plies. Antistatic copper wires. Green synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -20°C to +80°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed.** Other dimensions, length, colors and pressure available on request.



Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G SUPERTOP/10 12X19	10	40	0,27	40	120
TUBO G SUPERTOP/10 19X30	10	40	0,51	40	120
TUBO G SUPERTOP/10 25X37	10	40	0,68	40	120
TUBO G SUPERTOP/10 32X44	10	40	0,82	40	120
TUBO G SUPERTOP/10 38X52	10	40	1,2	40	120
TUBO G SUPERTOP/10 51X65	10	40	1,53	40	120
TUBO G SUPERTOP/10 63,5X78,5	10	40	2,02	40	120
TUBO G SUPERTOP/10 76X94	10	40	2,85	40	120
TUBO G SUPERTOP/10 102X122	10	40	4,25	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.



SUPERTOP/LL

Chemical Products Petrochemical products

Suction and delivery of a very wide range of chemical and petrochemical products including aromatic and aliphatic products. Smooth XLPE (cross-linked polyethylene) tube. High tensile synthetic plies. Anti-static copper wires. Embedded steel wire helix. Green synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -20°C to +80°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed.** Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G SUPERTOP/LL 19X32	10	40	Medium/Strong	115	0,92	40	120
TUBO G SUPERTOP/LL 25X38	10	40	Medium/Strong	155	1,06	40	120
TUBO G SUPERTOP/LL 35X49	10	40	Medium/Strong	220	1,4	40	120
TUBO G SUPERTOP/LL 38X52	10	40	Medium/Strong	250	1,54	40	120
TUBO G SUPERTOP/LL 40X54	10	40	Medium/Strong	280	1,65	40	120
TUBO G SUPERTOP/LL 50X66	10	40	Medium/Strong	345	2,23	40	120
TUBO G SUPERTOP/LL 60X75	10	40	Medium/Strong	450	2,73	40	120
TUBO G SUPERTOP/LL 76X94	10	40	Medium/Strong	545	3,78	40	120
TUBO G SUPERTOP/LL 102X121	10	40	Medium/Strong	775	5,17	40	120





ULTRATOP

ULTRATOP/10

Food Products Chemical Products Petrochemical products

Delivery of a very wide range of chemical and petrochemical products including aromatic and aliphatic products, also suitable for food products. Smooth UHMWPE (ultra high molecular weight polyethylene) tube, food quality to FDA and European specifications. High tensile synthetic plies. Antistatic copper wires. Green synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -20°C to +80°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed.** Other dimensions, length, colors and pressure available on request.

Descrizione	Working Press. bar	Bursting Press. bar	Weight kg/m		
TUBO G ULTRATOP/10 12X19	10	40	0,27	40	120
TUBO G ULTRATOP/10 19X30	10	40	0,51	40	120
TUBO G ULTRATOP/10 25X37	10	40	0,68	40	120
TUBO G ULTRATOP/10 40X54	10	40	1,2	40	120
TUBO G ULTRATOP/10 51X65	10	40	1,53	40	120
TUBO G ULTRATOP/10 63,5X78,5	10	40	2,02	40	120
TUBO G ULTRATOP/10 76X94	10	40	2,85	40	120
TUBO G ULTRATOP/10 102X122	10	40	4,25	40	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C





ULTRATOP/LL

Food Products **Chemical Products** **Petrochemical products**

Suction and delivery of a very wide range of chemical and petrochemical products including aromatic and aliphatic products, also suitable for food products. Smooth UHMWPE (ultra high molecular weight polyethylene) tube, food quality to FDA and European specifications. High tensile synthetic plies. Anti-static copper wires. Embedded steel wire helix. Green synthetic rubber cover acids, weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -20°C to +80°C. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed.** Other dimensions, length, colors and pressure available on request.




Descrizione	Working Press. bar	Bursting Press. bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ULTRATOP/LL 19X33	10	40	Medium/Strong	185	0,74	40	120
TUBO G ULTRATOP/LL 25X37	10	40	Medium/Strong	225	0,9	40	120
TUBO G ULTRATOP/LL 32X46	10	40	Medium/Strong	260	1,09	40	120
TUBO G ULTRATOP/LL 38X52	10	40	Medium/Strong	335	1,45	40	120
TUBO G ULTRATOP/LL 40X54	10	40	Medium/Strong	350	1,65	40	120
TUBO G ULTRATOP/LL 51X65	10	40	Medium/Strong	410	1,86	40	120
TUBO G ULTRATOP/LL 60X75	10	40	Medium/Strong	450	2,5	40	120
TUBO G ULTRATOP/LL 76X94	10	40	Medium/Strong	525	3,2	40	120
TUBO G ULTRATOP/LL 102X121	10	40	Medium/Strong	675	4,46	40	120

CHEMISPIR/S

Chemical Products

Thermoplastic hose for suction and delivery of acids at high concentration (up to 70% nitric acid, all concentrations of hydrochloric acid, up to 60% bromic acid, up to 80% sulphuric acid) and of basis, acid and basic salts, oxidizing agents such as potassic bichromate and potassic permanganate at 20% concentration). Good resistance to vegetable oils, fair resistance to mineral oils and painter's naphta. Used in the agricultural industry for conveying glyphosate acid and deltamethrin based herbicides and pesticides. Black smooth PE tube. Polyester yern reinforcement. Embedded steel wire helix. Green smooth thermoplastic rubber cover. Temperature range: -25°C to +70°C. Other dimensions, length and colors available on request. **Contact our technical department to check the compatibility of the hose with the temperature and the product to be conveyed.**



Descrizione	Working Press. at +23°C bar	Working Press. at +60°C bar	Bursting Press. at +23°C bar	Degree of suction	Bending radius mm	Weight kg/m	
TUBO P CHEMISPIR/S 19	25	14	75	Strong	100	0,34	60
TUBO P CHEMISPIR/S 25	25	14	75	Strong	120	0,43	60
TUBO P CHEMISPIR/S 32	18	14	54	Strong	150	0,59	60
TUBO P CHEMISPIR/S 38	17	13	51	Strong	200	0,8	30
TUBO P CHEMISPIR/S 51	14	13	42	Strong	250	1,15	30
TUBO P CHEMISPIR/S 63	12	11	36	Strong	300	1,45	30

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.



SUCTION OF AIR, FUMES AND DUSTS



ASPIRATOR/P

Ventilation/Suction of fumes and dusts

For ventilation and suction of air and non aggressive industrial fumes dusts. Black, smooth synthetic rubber tube. Synthetic plies reinforcement. Embedded steel wire helix. Black synthetic rubber cover weather, ozone and abrasion resistant, corrugated with textile finish. Temperature range: -30°C to +80°C. Other dimensions, length and colors available on request.

Descrizione	Working Press. bar	Bursting Press. Bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ASPIRATOR/P 40	1	3	Strong	100	0,7	20/40	120
TUBO G ASPIRATOR/P 45	1	3	Strong	120	0,95	20/40	120
TUBO G ASPIRATOR/P 50	1	3	Strong	125	1,2	20/40	120
TUBO G ASPIRATOR/P 60	1	3	Strong	150	1,25	20/40	120
TUBO G ASPIRATOR/P 80	1	3	Strong	200	1,4	20/40	120
TUBO G ASPIRATOR/P 90	1	3	Strong	260	1,64	20/40	120
TUBO G ASPIRATOR/P 100	1	3	Strong	300	1,98	20/40	120
TUBO G ASPIRATOR/P 120	1	3	Strong	400	2,3	20/40	120
TUBO G ASPIRATOR/P 127	1	3	Strong	450	2,5	20/40	120
TUBO G ASPIRATOR/P 150	1	3	Strong	530	3	20/40	120




ASPIRATOR/P/42M

Abrasion Resistant

For cement powder and other abrasive dusts. Tan gum natural rubber tube. Synthetic plies reinforcement. Embedded steel wire helix. Black synthetic rubber cover weather, ozone and abrasion resistant, corrugated with textile finish. Temperature range: -30°C to +70°C. Other dimensions, length and colors available on request.

Descrizione	Working Press. bar	Bursting Press. Bar	Degree of suction	Bending radius mm	Weight kg/m		
TUBO G ASPIRATOR/P/42M 80	1	3	Strong	200	1,4	20/40	120
TUBO G ASPIRATOR/P/42M 100	1	3	Strong	300	1,98	20/40	120

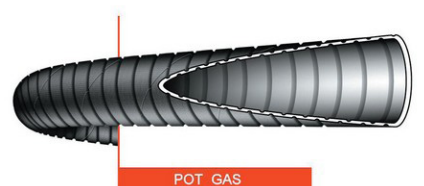

POT-GAS

Ventilation/Suction of fumes and dusts

Designed for discharge of exhaust gas in garages, engine test centers, etc. Can be driven over. Square corrugated black synthetic rubber tube. Black synthetic rubber cover weather, ozone and abrasion resistant, square corrugated with textile finish. Temperature range: -30°C to +120°C. Other dimensions, length and colors available on request.

Descrizione	Weight kg/m	Bursting Press. Bar		
TUBO G POT-GAS 51	1,2	120	20	120
TUBO G POT-GAS 76	1,9	190	20	120
TUBO G POT-GAS 100	2,9	250	20	120

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C



HIGH PRESSURE HOSE - HYDRAULIC HOSE

SAE 100/R 1 A T Hydraulic Hose

Black, synthetic rubber cover resistant to oil, abrasion, weather. One braid of steel wire reinforcement. Black, synthetic rubber tube resistant to mineral and vegetable oil, emulsifying oil, water. Temperature range: -40°C to +100°C (+125°C for short periods of time). Conforms to EN 853 1 SN.



Descrizione	Working Press. bar	Bursting Press. Bar	Bending radius mm	Weight kg/m	
TUBO G SAE 100/R 1 A T 3/16"	250	1000	90	0,18	>20<40
TUBO G SAE 100/R 1 A T 1/4"	225	900	100	0,23	>20<40
TUBO G SAE 100/R 1 A T 5/16"	215	850	115	0,265	>20<40
TUBO G SAE 100/R 1 A T 3/8"	180	720	130	0,325	>20<40
TUBO G SAE 100/R 1 A T 1/2"	160	640	180	0,41	>20<40
TUBO G SAE 100/R 1 A T 5/8"	130	520	200	0,475	>20<40
TUBO G SAE 100/R 1 A T 3/4"	105	420	240	0,61	>20<40
TUBO G SAE 100/R 1 A T 1"	88	350	300	0,94	>20<40
TUBO G SAE 100/R 1 A T 1 1/4"	63	250	420	1,19	>20<40

SAE 100/R 2 A T Hydraulic Hose

Black, synthetic rubber cover resistant to oil, abrasion, weather. Two braids of steel wire reinforcement. Black, synthetic rubber tube resistant to mineral and vegetable oil, emulsifying oil, water. Temperature range: -40°C to +100°C (+125°C for short periods of time). Conforms to EN 853 2 SN.



Descrizione	Working Press. bar	Bursting Press. Bar	Bending radius mm	Weight kg/m	
TUBO G SAE 100/R 2 A T 3/16"	415	1650	90	0,3	>20<40
TUBO G SAE 100/R 2 A T 1/4"	400	1600	100	0,36	>20<40
TUBO G SAE 100/R 2 A T 5/16"	350	1400	115	0,45	>20<40
TUBO G SAE 100/R 2 A T 3/8"	330	1320	130	0,53	>20<40
TUBO G SAE 100/R 2 A T 1/2"	275	1100	180	0,625	>20<40
TUBO G SAE 100/R 2 A T 5/8"	250	1000	200	0,735	>20<40
TUBO G SAE 100/R 2 A T 3/4"	215	850	240	0,92	>20<40
TUBO G SAE 100/R 2 A T 1"	165	650	300	1,38	>20<40
TUBO G SAE 100/R 2 A T 1 1/4"	125	500	420	2,1	>20<40

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C


We have made every effort to ensure that details and information given in this catalogue are accurate at the time of issue but give no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included and furthermore our policy is one of continuous improvement and the right is reserved to alter details and information at any time as the need arises. No part of this publication may be reproduced or transmitted in any form or by any means including photocopying and recording, without our written permission.

81 - RUBBER HOSE



SAE 4 SH Hydraulic Hose


Black, synthetic rubber cover resistant to oil, abrasion, weather. Four spirals of steel wire reinforcement. Black, synthetic rubber tube resistant to mineral and vegetable oil, emulsifying oil, water. Temperature range: -40°C to +100°C (+125°C for short periods of time). Conforms to EN 856 4 SH.

Descrizione	Working Press. bar	Bursting Press. Bar	Bending radius mm	Weight kg/m	
TUBO G SAE 4SH 3/4"	420	1680	280	1,6	>20<40
TUBO G SAE 4SH 1"	380	1520	340	2,06	>20<40
TUBO G SAE 4SH 1"1/4	325	1300	460	2,56	>20<40
TUBO G SAE 4SH 1"1/2	290	1160	560	3,42	>20<40
TUBO G SAE 4SH 2"	250	1000	700	4,5	>20<40



SAE 4 SP Hydraulic Hose

Black, synthetic rubber cover resistant to oil, abrasion, weather. Four spirals of steel wire reinforcement. Black, synthetic rubber tube resistant to mineral and vegetable oil, emulsifying oil, water. Temperature range: -40°C to +100°C (+125°C for short periods of time). Conforms to EN 856 4 SP.

Descrizione	Working Press. bar	Bursting Press. Bar	Bending radius mm	Weight kg/m	
TUBO G SAE 4SP 1/4"	450	1800	150	0,63	>20<40
TUBO G SAE 4SP 3/8"	445	1780	180	0,8	>20<40
TUBO G SAE 4SP 1/2"	415	1660	230	0,96	>20<40
TUBO G SAE 4SP 5/8"	350	1400	250	1,17	>20<40
TUBO G SAE 4SP 3/4"	350	1400	300	1,6	>20<40
TUBO G SAE 4SP 1"	280	1120	340	2,03	>20<40
TUBO G SAE 4SP 1"1/4	210	840	460	3,15	>20<40
TUBO G SAE 4SP 1"1/2	185	740	560	3,65	>20<40
TUBO G SAE 4SP 2"	165	660	660	4,95	>20<40

TEAMTEC sas THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

Notes:

[illegible]



TeamTec sas Via Prima Strada, 35 35129 Padova - ITALY

T: +39 049 20 20 854

www.teamtec.it

teamtec@teamtec.it