


Gas Hose - LPG and NG Delivery - GHLL 65 D

Application/service:

Long Length construction hose for low pressure service of LPG and NG on car and light vehicles applications.

Also available in preformed curves/bends.

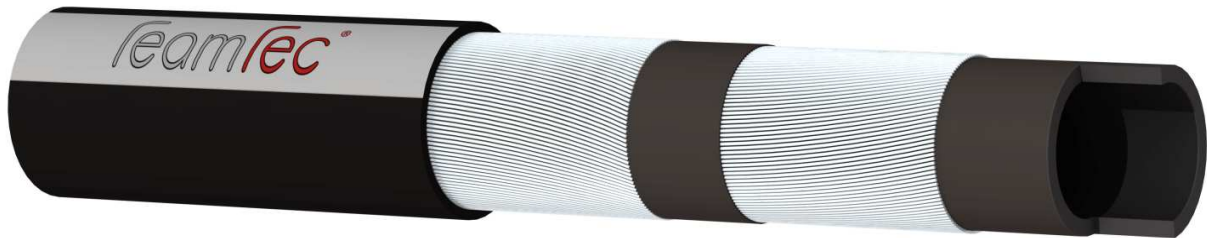

Construction:

Tube: black, smooth, synthetic rubber, gasproof.

Reinforcement: high strength textile braid.

Cover: black, smooth synthetic rubber heat, oil, fuel, lubricants and ageing resistant. It is pin-pricked.

Complies with R.110-00 Class 2 and R.67-01 1996 Class 2.

Working temperature: -20°C to +125°C (-4°F to +257°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
4	5/32	10	0.39	4.5	65	45	650	0.10	0.06	100	3.9	100	330
5	3/16	11	0.43	4.5	65	45	650	0.11	0.07	100	3.9	100	330
6	1/4	13	0.51	4.5	65	45	650	0.14	0.09	100	3.9	100	330
8	5/16	15	0.59	4.5	65	45	650	0.18	0.12	100	3.9	100	330
10	3/8	17	0.67	4.5	65	40	600	0.21	0.14	100	3.9	100	330
12	15/32	19	0.75	4.5	65	30	450	0.26	0.17	100	3.9	100	330
14	35/64	22	0.87	4.5	65	30	450	0.32	0.22	150	5.9	100	330
17	43/64	24	0.94	4.5	65	287	420	0.35	0.24	180	7.1	100	330
19	3/4	27	1.06	4.5	65	24	360	0.44	0.30	180	7.0	100	330

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.