


Petroleum Products - Fuel Oil Delivery - PPFO 75 D

Application/service:

Long length hose for transferring fuel oil and commercial gasoline; specially designed as flexible connection between the engine and the fuel distribution system. For unleaded fuel with max. 5% MTBE and 15% oxygenated compounds.

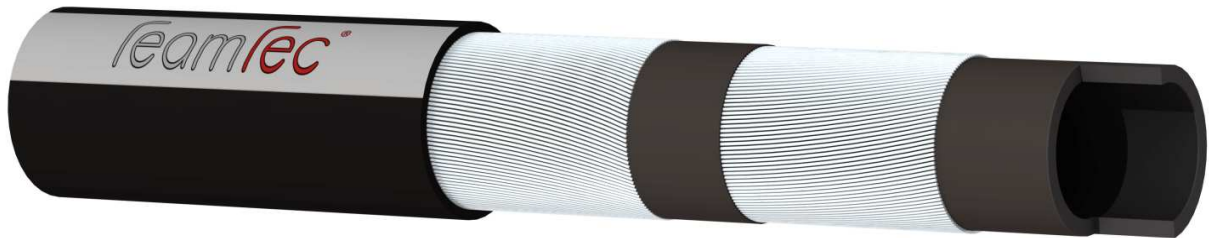

Construction:

Tube: black, smooth, synthetic rubber suitable for petroleum products with max 50% aromatic content.

Reinforcement: high tensile synthetic braid.

Cover: black, smooth synthetic rubber wear, oil, lubricants, heat and ageing resistant.

Working temperature: -25°C to +125°C (-13°F to +257°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		vacuum	Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	bar	m	ft
5	3/16	11	0.43	5	75	20	300	0.10	0.07	0.8	100	330
6	1/4	13	0.51	5	75	20	300	0.15	0.10	0.8	100	300
8	5/16	14.5	0.57	5	75	20	300	0.17	0.11	0.8	100	300
10	3/8	16	0.63	5	75	20	300	0.19	0.13	0.8	100	300

Other dimensions and pressures available on request

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.