


Petroleum Products - General Purpose - PPGP 150 D

Application/service:

For discharge of gasoline, heating oil and diesel oil and for the refueling of trucks, locomotives, buses, agricultural machines.

For longer life drain hose after use.

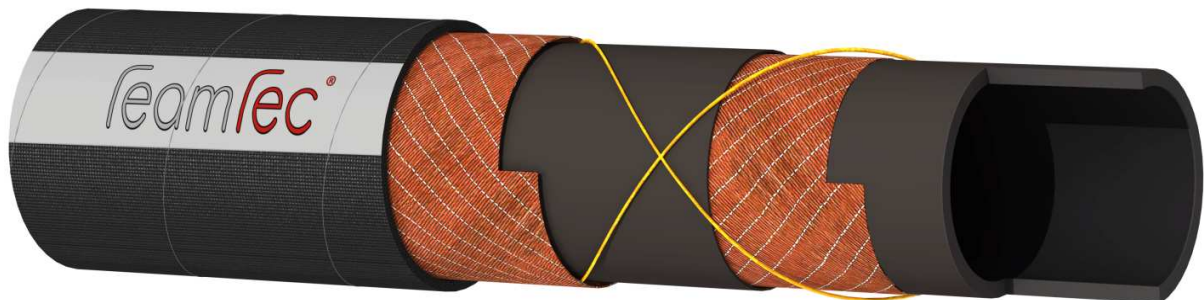

Construction:

Tube: black, smooth, synthetic rubber suitable for petroleum products with max 40% aromatic content.

Reinforcement: synthetic cord plies and antistatic copper wires.

Cover: black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant.

On request, **available with flame resistant rubber according to TRbF - 131 - Teil 2-5.5.**

Working temperature: -20°C to +70°C (-4°F to +158°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
13	1/2	20	0.79	10	150	40	600	0.27	0.18	61	200
19	3/4	27	1.06	10	150	40	600	0.39	0.26	61	200
25	1	35	1.38	10	150	40	600	0.66	0.44	61	200
32	1-1/4	42	1.65	10	150	40	600	0.81	0.54	61	200
38	1-1/2	48	1.89	10	150	40	600	0.90	0.60	61	200
51	2	63	2.48	10	150	40	600	1.46	0.98	61	200
63.5	2-1/2	76	3.00	10	150	40	600	1.95	1.31	61	200
76	3	90	3.54	10	150	40	600	2.30	1.55	61	200
102	4	118	4.65	10	150	40	600	3.48	2.34	61	200

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.