


Petroleum Products - General Purpose S&D - PPGP 150 SD

Application/service:

For suction and discharge of gasoline, heating oil and diesel oil and for the refueling of trucks, locomotives, buses, agricultural machines.

For longer life drain hose after use.

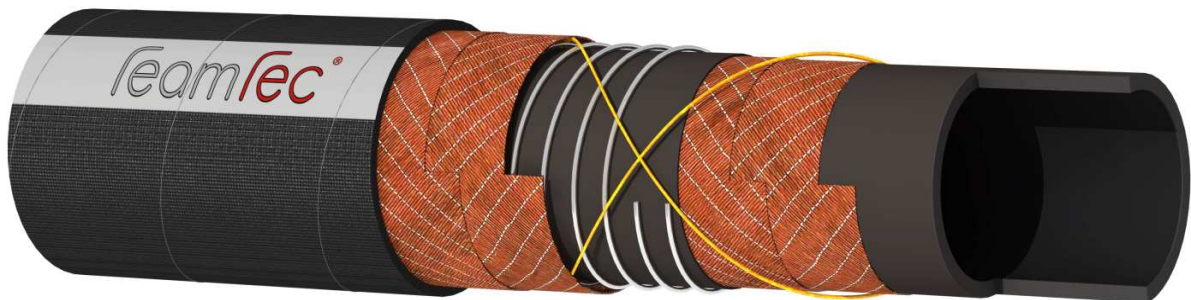

Construction:

Tube: black, smooth, synthetic rubber suitable for petroleum products with max 40% aromatic content.

Reinforcement: synthetic cord plies, embedded steel wire helix and antistatic copper wire.

Cover: black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant.

On request, available with flame resistant rubber according to TRbF - 131 - Teil 2-5.5.

Working temperature: -20°C to +70°C (-4°F to +158°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		vacuum	Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
19	3/4	29	1.14	10	150	30	450	0.58	0.39	100	3.9	0.8	61	200
25	1	35	1.38	10	150	30	450	0.72	0.48	130	5.1	0.8	61	200
32	1-1/4	42	1.65	10	150	30	450	0.89	0.60	160	6.3	0.8	61	200
38	1-1/2	48	1.89	10	150	30	450	1.10	0.74	200	7.9	0.8	61	200
51	2	61	2.40	10	150	30	450	1.39	0.93	260	10.2	0.8	61	200
63.5	2-1/2	74.5	2.93	10	150	30	450	1.98	1.33	350	13.8	0.8	61	200
76	3	88	3.46	10	150	30	450	2.48	1.67	410	16.1	0.8	61	200
102	4	118	4.65	10	150	30	450	4.40	2.96	560	22.0	0.8	61	200

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.