


# Petroleum Products - Fuel Oil Reel - PPOR 270 D

## Application/service:

Transfer of refined commercial fuels (gasoline and diesel), oils and other petroleum products, specially designed for use on service truck. Suitable for unleaded gasoline with max. 5% MTBE and 15% oxygenated compounds and for intermittent use with bio-diesel.

For longer life drain hose after use.

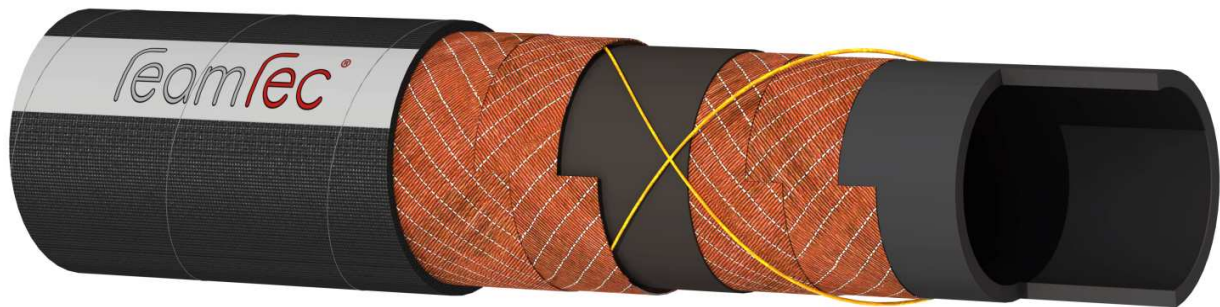

## Construction:

**Tube:** black, smooth, synthetic rubber suitable for petroleum products with max. 60% aromatic content.

**Reinforcement:** synthetic cord plies and antistatic copper wires.

**Cover:** black, smooth (cloth finish) synthetic rubber wear, oil, lubricants, heat and ageing resistant. Antistatic.

**Flame resistant according to TRbF 131 - Teil 2-5.5**

**Working temperature:** -30°C to +70°C (-22°F to +158°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
25	1	38	1-1/2	18	270	72	1080	0.83	0.56	180	7.1	61	200
32	1-1/4	46	1.81	18	270	72	1080	1.16	0.78	220	8.7	61	200
38	1-1/2	52	2.04	18	270	72	1080	1.30	0.87	250	9.8	61	200
51	2	65	2.56	18	270	72	1080	1.60	1.08	280	11.0	61	200

Other dimensions and pressures available on request.

\* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.