


OIL RIG - Fire Deluge Water 300 D

Application/service:

Water delivery hose for deluge systems on offshore oilrig installations.

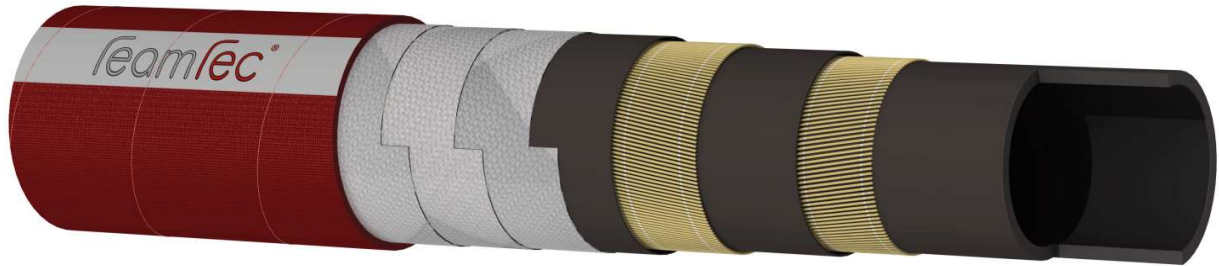

Construction:

Tube: black, smooth CR rubber specially compounded to resist fire in accordance to ISO 15540:1999 specs (+800°C / +1472°F for 30 minutes).

Reinforcement: multiple layers of steel wire reinforcements, and layers of synthetic rubber encapsulating the steel wire reinforcements. Three layers of glass fiber.

Cover: red, smooth (cloth finish) CR rubber wear, oil, lubricants, heat and ageing resistant.

Tube and cover fire resistant to ISO 15540:1999 specs (+800°C / +1472°F for 30 minutes).

Working temperature: -30°C to +100°C (-22°F to +212°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		bending radius		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
76	3	108	4.25	20	300	>80	>1200	7.40	4.97	450	17.72	61	200
102	4	134	5.28	20	300	>80	>1200	9.80	6.59	600	23.62	61	200

Other dimensions and pressures available on request.

* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.