


# OIL RIG - High Pressure Air/Water 600 D

## Application/service:

High pressure compressed air/water applications requiring maximum flexibility and kink resistance in oil rig operations. Available on request with conductive tube and/or cover (black). A tough, flexible, kink resistant construction for long service life.

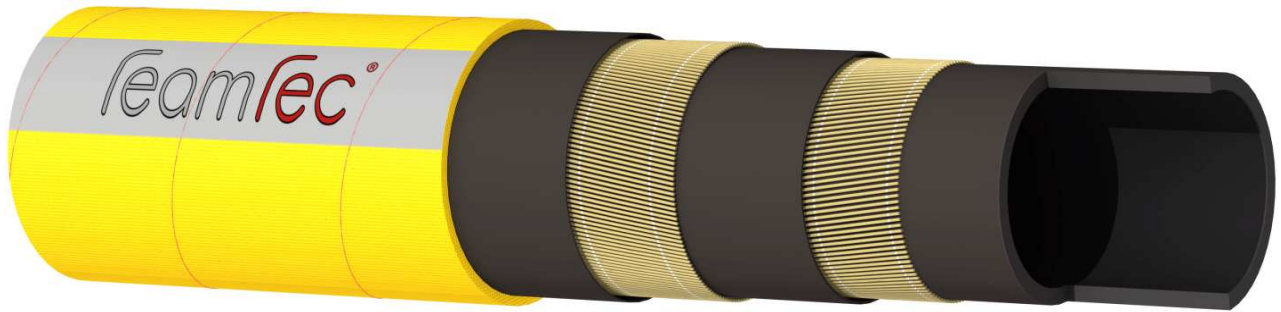

## Construction:

**Tube:** black, smooth, synthetic rubber oil mist resistant.

**Reinforcement:** steel wire cord.

**Cover:** yellow, smooth (cloth finish) CR rubber wear, oil, lubricants, heat and ageing resistant.

**Fire resistant cover to ISO 15540:1999 specs (+80°C / +1472°F for 30 minutes).**

**Working temperature:** -30°C to +80°C (-22°F to +176°F).

inside diameter		outside diameter		working pressure		burst pressure		weight		Max. length*	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
19	3/4	31	1.22	60	900	180	2700	0.70	0.47	61	200
25	1	37	1.46	45	675	160	2400	0.92	0.62	61	200
32	1-1/4	45	1.77	45	675	140	2100	1.22	0.82	61	200
38	1-1/2	52	2.05	40	600	135	2025	1.51	1.01	61	200
51	2	65	2.56	40	600	135	2025	2.15	1.44	61	200
63.5	2-1/2	80	3.15	30	450	100	1500	2.89	1.94	61	200
76	3	94	3.70	30	450	90	1350	3.92	2.63	61	200
102	4	122	4.80	30	450	90	1350	6.15	4.13	61	200

Other dimensions and pressures available on request.

\* All lengths coiled and wrapped in polyethylene film.

Specific cut lengths available. Please, contact Customer Service for details.

Due to a continual improvement of the products, we reserve the right to alter the hose specifications without prior notice.